

WALLFLEX

Practical

- Polyurethane coating aids maintenance.
- Clean, simple design for an uncomplicated look or the addition of a frieze if desired.
- 1.5 metre width ideal dado height for ease of installation.

Durable

- Polyurethane coating reduces maintenance costs and protects long term appearance.
- Homogeneous construction for excellent dent and gouge resistance.

Applications

- Hospital
- Aged Care
- Health Care
- Education
- Light Industrial
- Mercantile
- Hospitality

TECHNICAL DATA

		WALLFLEX	WALLFLEX
Type of floor covering/wall covering	EN 649	Homogeneous sheet vinyl	Homogeneous sheet vinyl
Manufactured in		Australia	Australia
Overall Thickness	EN 428	1.25mm	2.0mm
Wear Layer thickness	EN 429	1.25mm	2.0mm
Roll dimensions	EN 426	1.5m x 20m	1.5m x 20m
Polyurethane Reinforced		Yes PUR	Yes PUR
Wear resistance	EN 660-2		
Slip Resistance	AS 4586		
Appendix A: Wet pendulum		N/A	N/A
Appendix C: Wet/barefoot ramp			
Appendix D: Oil-wet ramp			
Fire Resistance	ISO 9239-1		
Critical Radiant Flux		N/A	N/A
Smoke Development Rate			
Fire Resistance	AS/NZS 3837		
Cone Calorimeter		Group 2	Group 1
Average specific extinction area		<250m ² /kg	<250m ² /kg
Classification (Use Area)	EN ISO 10874	N/A	N/A



WALLFLEX

1.25mm x 1.5m x 20m



DOVE WHITE



BLUE HARMONY



ACID GREEN




NEUTRAL WHITE




ICE WHITE




LINEN



COOL WHITE

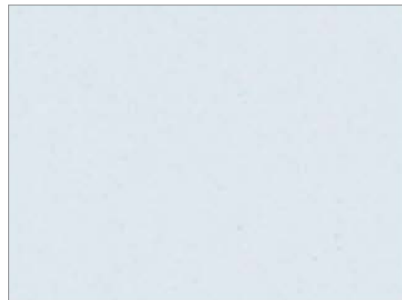

BLUE GREY

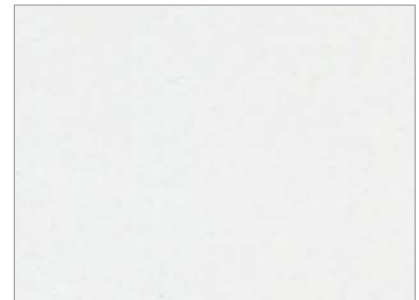

MUSHROOM



ALABASTER

WALLFLEX

(2mm x 1.5m x 20m)

